





PT kg 50, 75, 100, 150 .....  
 Approvazione ATEX  II 1 G  II 2 D (zone 0-1-2-21-22) / ATEX approved (zone 0-1-2-21-22)

Euro 180,00  
 Euro 10,00

APPROVAZIONE  R60 C3  $V_{min} = E_{max} / 10000$

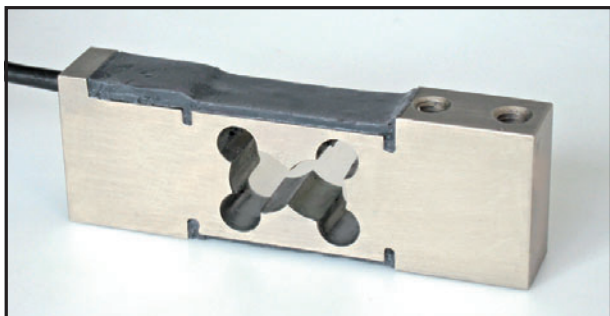

- ESECUZIONE IN ACCIAIO SPECIALE
- ERRORE COMBINATO  $\leq \pm 0,02\%$
- GRADO DI PROTEZIONE IP 67
- SPECIAL STEEL CONSTRUCTION
- COMBINED ERROR  $\leq \pm 0.02\%$
- PROTECTION CLASS IP 67

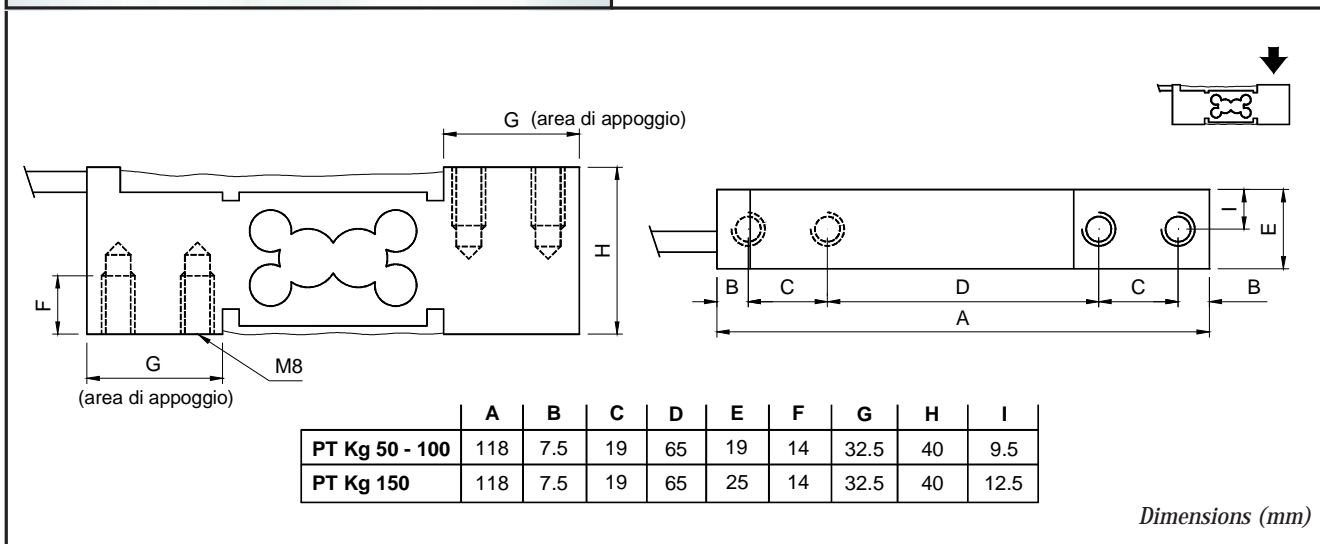

**CARATTERISTICHE TECNICHE**

**TECHNICAL FEATURES**

SENSIBILITA'  
 EFFETTO DELLA TEMPERATURA SULLO ZERO  
 EFFETTO DELLA TEMPER. SUL FONDO SCALA  
 COMPENSAZIONE TERMICA  
 CAMPO DI TEMPERATURA DI LAVORO  
 CREEP A CARICO NOMINALE DOPO 4 ORE  
 TENSIONE DI ALIMENTAZIONE MAX TOLLERATA  
 RESISTENZA D'INGRESSO  
 RESISTENZA DI USCITA  
 BILANCIAMENTO DI ZERO  
 RESISTENZA D'ISOLAMENTO  
 CARICO STATICO MASSIMO  
 CARICO DI ROTTURA in % sul FONDO SCALA  
 DEFLESSIONE A CARICO NOMINALE

**2 mV/V** +/- 10%  
 0.0014 % / °C  
 0.0013 % / °C  
 - 10°C / + 40°C  
 - 20°C / + 60°C  
 0.03%  
 15 Volt  
 381 Ohm +/-20  
 350 Ohm +/-4  
 +/- 1 %  
 > 5000 MOhm  
 120 %  
 > 300 %  
 0.5 mm


**SENSITIVITY**  
**TEMPERATURE EFFECT ON ZERO**  
**TEMPERATURE EFFECT ON SPAN**  
**COMPENSATED TEMPERATURE RANGE**  
**OPERATING TEMPERATURE RANGE**  
**CREEP AT NOMINAL LOAD IN 4 HOURS**  
**MAX SUPPLY VOLTAGE WITHOUT DAMAGE**  
**INPUT RESISTANCE**  
**OUTPUT RESISTANCE**  
**ZERO BALANCE**  
**INSULATION RESISTANCE**  
**MECHANICAL LIMIT IN SERVICE**  
**DESTRUCTIVE LOAD**  
**DEFLECTION AT NOMINAL LOAD**

**CAVO**

**CABLE**

LUNGHEZZA 3 m  
 DIAMETRO 5 mm  
 FILI CONDUTTORI 4/6 x0.20mm<sup>2</sup>

LENGHT  
 DIAMETER  
 CORES

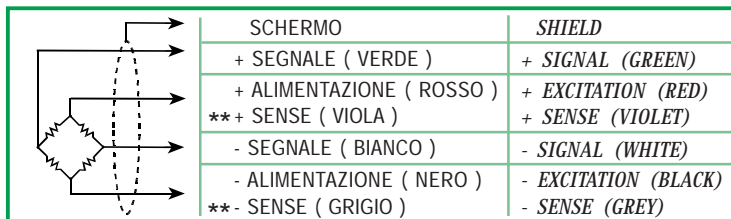

\*\* Dove previsto (where provided)